

Intrinsically Safe Compact Balances

EK-EP

Series



EK-3000EP

For precise weight measurement in potentially explosive atmospheres



EK-300EP

IECEx:

Ex ia IIB T3 Ga

ATEX:

II 1G Ex ia IIB T3 Ga

FM/FMc (NEC505): AEx / Ex ia IIB T3

FM/FMc (NEC500): IS / I / 1 / C,D / T3C



...Clearly a Better Value



Features

- ✓ Compact, lightweight and extremely affordable while providing excellent explosion protection
- ✓ Battery operation*¹ (approx. 250 hours) for high portability, requiring no power supply from a safe area via a safety barrier
- ✓ Auto power OFF function to save battery power
- ✓ Easy-to-read LCD display with backlight (16 mm character height)
- ✓ Hygienic and chemically resistant stainless steel (SUS304) weighing pan
- ✓ Multiple weighing units: g, oz, lb, ozt, ct, mom, dwt, gr, N, in addition to pcs (counting mode), % (percent mode) and SG (specific gravity)*²
- ✓ Comparator function for faster and more accurate filling, packing, sorting, etc.
- ✓ Adjustable response characteristics depending on the degree of drafts and vibrations at the location
- ✓ Security ring for wire-locking the balance to prevent theft

*¹ Only to be used with four DURACELL AA alkaline MN1500 LR6, ENERGIZER AA E91 alkaline LR6 AM3, or Panasonic AA alkaline LR6 (XJ) 1.5V batteries.

*² Either tl (tael) or tol (tola) can be added upon request.

**Specifications**

	EK-300EP	EK-3000EP	EK-12KEP
Weighing capacity	300 g	3000 g	12 kg
Minimum weighing value	0.01 g	0.1 g	1 g
Repeatability (standard deviation)	0.01 g	0.1 g	1 g
Linearity	±0.02 g	±0.2 g	±1 g
Sensitivity drift	±20 ppm/°C (10 to 30°C/50 to 86°F)		
Counting mode	Min. unit weight* ³	0.01 g	0.1 g
	No. of samples	5, 10, 25, 50 or 100 pieces	
Percent mode	Min. % display	0.1%	
	Min. 100% weight	1 g	10 g
Operating temperature and humidity	0 to 40°C/32 to 104°F, 85% RH or less (no condensation)		
Battery life	Approx. 250 hours (with four AA alkaline batteries* ¹ , backlight off)		
Weighing pan size	φ110 mm	133×170 mm	
Net weight	Approx. 1.2 kg	Approx. 1.5 kg	
Calibration weight* ³	300 g	3000 g	10 kg


*³ Factory setting

Options


EJ-12 Carrying case

**Dimensions (mm/inches)**

EK-300EP

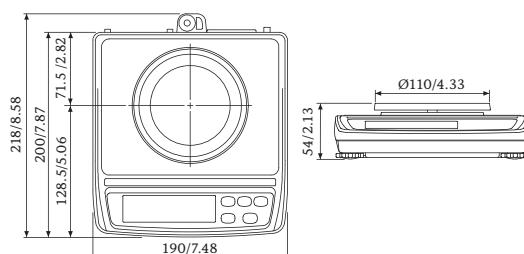

EK-3000EP / EK-12KEP

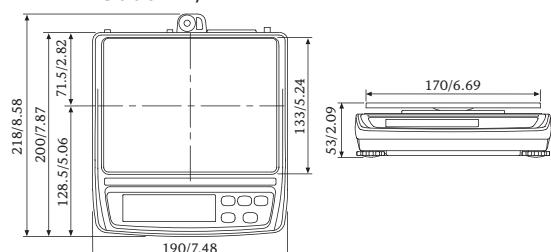

Wägetechnik Koch

Beratung - Verkauf - Service

Helga B. Koch & Günter Koch GbR, Dorfstraße 7, 94486 Osterhofen-Gergweis,
Tel. 08547 - 914232, Fax 08547 - 914233

<http://www.waegetechnik-koch.de>, info@waegetechnik-koch.de